

# PINNACLE SELF-CONTAINED COMPACTORS

COLLECT IT... CONTAIN IT... COMPACT IT!



Compact and Contain Liquid Food Waste



12 to 39 Cubic Yard Capacities



Adjustable "Leak Tight" Gate



"The Flex" Power Unit & Pressure Cylinders

[PinnacleCompactors.com](http://PinnacleCompactors.com)

# PINNACLE SELF-CONTAINED COMPACTORS

Pinnacle SC Compactors are specifically designed to provide containment in food and liquid waste applications.

Standard Sizes from 15 yd to 39 yd available

Sales, Service, Technical Support, Delivery, Installation, and Parts... Pinnacle is your one stop shop for all your compactor needs.

SC compactors come standard with "dual twin cylinders" for space efficiency

Standard SC Head height = 48"  
(Optional low profile heads = 42" high)

# PINNACLE SEALED GATE SETS THE STANDARD

Pinnacle's "LeakTight" gate design ensures liquid containment with dual ratchet closure and adjustable gate hinges

Pinnacle provides standard and customized load options... security chutes, custom load hoppers doghouse enclosures, cart tippers, and full weather enclosures.

Other optional features include... Oil Heaters, Odor Control, Auto Cycles, Multi Cycles, Remote Controls, Trash Monitoring Systems, Phase Converters, and much more.

Pinnacle Technical Service Team provides exceptional support before, during, and after the sale

Pinnacle Compactors meet and exceed all ANSI Z245 specifications.




## FLEX POWER YOU CAN DEPEND ON

- ⚡ The Flex Power Unit by Pinnacle is state of the art and provides unmatched performance
- ⚡ Standard 15HP motor and 12 GPM exceeds industry standards on SC's
- ⚡ Calibrating and learning technology makes The Flex a universal exchange with other brands
- ⚡ Soft shift hydraulics combined with pressure cylinders out performs bypass cylinder systems
- ⚡ Pinnacle PLR & PLC Operating Systems Are More Reliable, Durable, & Easier to Troubleshoot
- ⚡ All Pinnacle power units are UL Listed and approved



# SELF-CONTAINED COMPACTOR SPECIFICATIONS

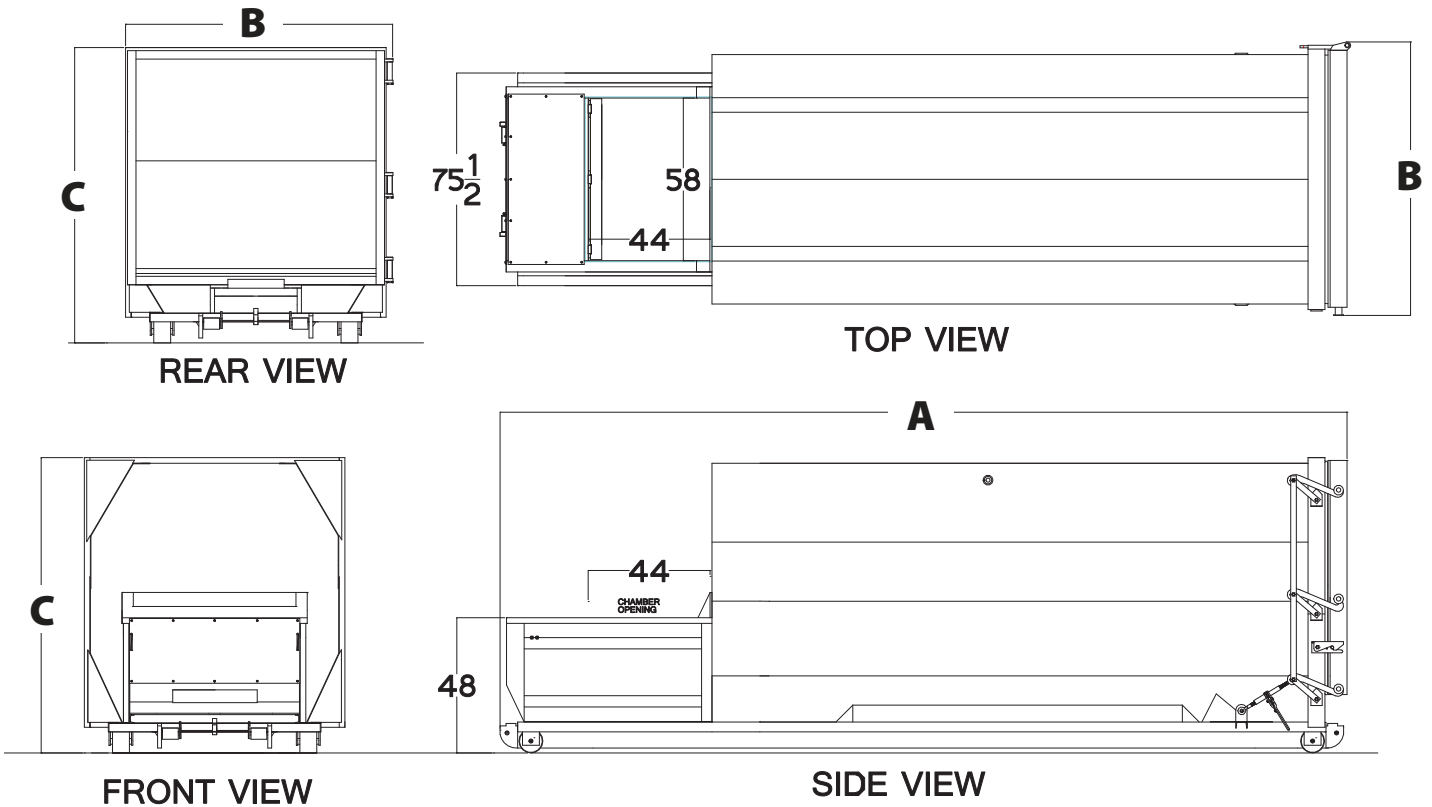

	SC-15 (15 YD)	SC-20 (20 YD)	SC-30 (30 YD)	SC-35 (35 YD)	SC-39 (39 YD)
<b>A</b> - Overall Length	177"	215"	261"	278"	299"
<b>B</b> - Overall Width	96"	96"	96"	96"	96"
<b>C</b> - Overall Height	89"	89"	105"	105"	105"
Cleartop Openings (L X W)	42" X 60"	42" X 60"	42" X 60"	42" X 60"	42" X 60"
Discharge Openings	37" X 60"	37" X 60"	37" X 60"	37" X 60"	37" X 60"
Ram Penetration	6"	6"	6"	6"	6"
Normal Force	55,300 LBS @2300 PSI	55,300 LBS @2300 PSI	55,300 LBS @2300 PSI	55,300 LBS @2300 PSI	55,300 LBS @2300 PSI
Maximum Force	62,800 LBS @2550 PSI	62,800 LBS @2550 PSI	62,800 LBS @2550 PSI	62,800 LBS @2550 PSI	62,800 LBS @2550 PSI
Ram Face	60" X 29"	60" X 29"	60" X 29"	60" X 29"	60" X 29"
Cycle Time	33 Sec	33 Sec	33 Sec	33 Sec	33 Sec
Motor	15 HP	15 HP	15 HP	15 HP	15 HP
Pump	12 GPM	12 GPM	12 GPM	12 GPM	12 GPM
Cylinders (X2)	4"	4"	4"	4"	4"
Rod/Stroke	2" X 35"	2" X 35"	2" X 35"	2" X 35"	2" X 35"



[bwe-nc.com](http://bwe-nc.com)



[pinnaclecompactors.com](http://pinnaclecompactors.com)

1808 Norwood Street SW  
 Lenoir, NC 28645  
 828/726-3001 (phone)  
 828/726-3010 (fax)

**800-221-4153**